

ACOUSTIC SURVEY DEVICE

Publication number: JP2002048867 (A)

Publication date: 2002-02-15

Inventor(s): YOSHIZUMI KAZUHIRO; TAKAGI SHIGERU; NAKAGAWA KEIZO

Applicant(s): MITSUBISHI HEAVY IND LTD

Classification:

- **international:** **G01V1/00; G01H3/00; G01S7/526; G01S15/42; G01V1/00; G01H3/00; G01S7/523; G01S15/00;** (IPC1-7): G01S15/42; G01H3/00; G01S7/526; G01V1/00

- **European:**


Application number: JP20000239030 20000807

Priority number(s): JP20000239030 20000807

Abstract of **JP 2002048867 (A)**

PROBLEM TO BE SOLVED: To solve the problem that it is difficult to calculate the strength of reflection on a body at a part to be surveyed since the strength of reflection is not taken into consideration although the position can be estimated as a conventional acoustic survey device performs operation while replacing a signal corresponding to the survey position of the body with a time or phase.

SOLUTION: The intensity of the sound wave when it reaches a receiver after being sent out of a transmitter and reflected by the body is previously measured or calculated and the signal received by the receiver is multiplied by this value to decide the strength of the reflection.

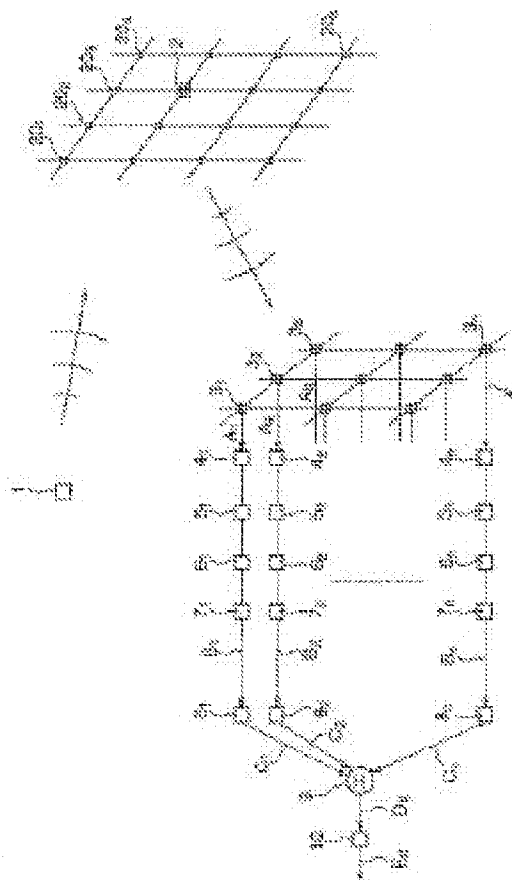

Data supplied from the **esp@cenet** database — Worldwide